


# Quectel FCU741R

Wi-Fi 4 Module

Ultra-compact LCC Package

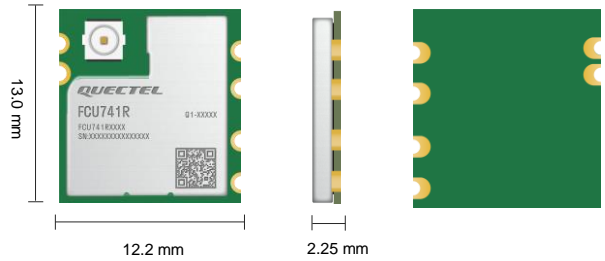

FCU741R is a high-performance Wi-Fi 4 module launched by Quectel, supporting 2.4 GHz and 5 GHz frequencies. It can be used for WLAN connection. With an ultra-compact size of 13.0 mm × 12.2 mm × 2.25 mm, the module optimizes the size and cost for end-products, which fully meets the demands of size-sensitive applications.

Designed with a reliable USB 2.0 interface, the module can ensure high sensitivity in interference environments, and the maximum data rate can be up to 150 Mbps. The module supports two antenna designs: first generation RF coaxial connector and pin antenna interface.

Surface-mount technology (SMT) makes FCU741R an ideal solution for durable and rugged designs. The low profile and small size of LCC package ensure that it can be easily embedded into size-constrained applications and provide reliable connectivity with these applications. The advanced package and the laser-engraved label with better heat dissipation and indelible markings allow for large-scale automated manufacturing which has strict requirements on cost and efficiency.



## Key Features

- ✓ Wi-Fi 4 module, supporting 2.4 GHz/ 5 GHz Wi-Fi bands
- ✓ USB 2.0 interface which features higher data transmission rate and low power consumption
- ✓ Faster time-to-market: simple design minimizes design-in time and development efforts
- ✓ Operating temperature range: -20 °C to +70 °C



Ultra-compact Size



LCC Package



IEEE 802.11  
a/b/g/n



USB 2.0  
Interface



Operating Temperature  
Range: -20 °C to +70 °C

# Quectel FCU741R

Wi-Fi 4		FCU741R	
WLAN Protocol	IEEE 802.11a/b/g/n		
Wi-Fi Frequency Band	2.4 GHz/ 5 GHz		
Wi-Fi Antenna	1 × 1		
Wi-Fi Modulation Mode	CCK/ DBPSK/ DQPSK/ BPSK/ QPSK/ 16QAM/ 64QAM		
Encryption Mode	WPA3		
Wi-Fi Operating Mode	AP/ STA/ AP + STA		
Dimensions	13.0 mm × 12.2 mm × 2.25 mm		
Weight	Approx. 0.68 g		
<b>Temperature Range</b>			
Operating Temperature Range	-20 °C to +70 °C		
<b>Data Rate (Max.)</b>			
802.11a	54 Mbps		
802.11b	11 Mbps		
802.11g	54 Mbps		
802.11n	150 Mbps		
<b>Interfaces</b>			
USB 2.0	× 1 (for Wi-Fi)		
Wi Fi Antenna	× 1		
<b>Electrical Features</b>			
Power Supply Voltage	VBAT: 3.0–3.6 V, Typ. 3.3 V		
Power Consumption	Max. current at Tx mode: 400 mA @ VBAT		
<b>Certification</b>			
Regulatory	<b>Europe:</b> CE <b>America:</b> FCC <b>China:</b> SRRC <b>Canada:</b> IC <b>Australia/New Zealand:</b> RCM <b>Japan:</b> JATE/ TELEC <b>South Korea:</b> KC*		
<b>Wi-Fi Performance</b>			
		<b>Receiver Sensitivity (Typ.)</b>	<b>Transmit Power (Typ.)</b>
	<b>802.11b/1 Mbps</b>	-98 dBm	21 dBm
	<b>802.11b/11 Mbps</b>	-88.5 dBm	21 dBm
	<b>802.11g/6 Mbps</b>	-94 dBm	19 dBm
2.4 GHz	<b>802.11g/54 Mbps</b>	-77 dBm	19 dBm
	<b>802.11n/HT20 MCS 0</b>	-94 dBm	19 dBm
	<b>802.11n/HT20 MCS 7</b>	-75 dBm	18 dBm
	<b>802.11n/HT40 MCS 0</b>	-91 dBm	19 dBm
	<b>802.11n/HT40 MCS 7</b>	-72 dBm	18 dBm

**NOTE:**

\*: Planning.

# Quectel FCU741R

## Wi-Fi 4

## FCU741R

### Wi-Fi Performance

	Receiver Sensitivity (Typ.)	Transmit Power (Typ.)
5 GHz	802.11a/6Mbps	-92.5 dBm
	802.11a/54 Mbps	-75.5 dBm
	802.11n/HT20 MCS 0	-92 dBm
	802.11n/HT20 MCS 7	-73.5 dBm
	802.11n/HT40 MCS 0	-89.5 dBm
	802.11n/HT40 MCS 7	-69.5 dBm

Ordering Code	Antenna	Shielding Cover	Dimensions	Development Board (Only for Debugging)
FCU741RACMD	1st generation RF coaxial connector	With shielding cover	13.0 mm × 12.2 mm × 2.25 mm	FCU741RACTA
FCU741RADMD	Pin antenna interface	With shielding cover	13.0 mm × 12.2 mm × 2.25 mm	FCU741RADTA