




Quectel FGM842D Series

Wi-Fi 4 & BLE 5.2 Module Compact LGA Package

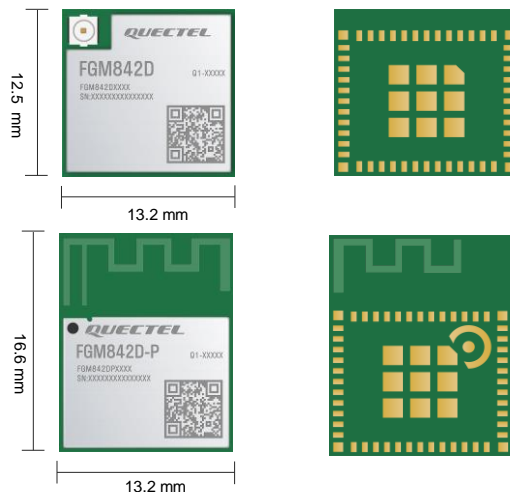

FGM842D is a series of the cutting-edge MCU Wi-Fi and Bluetooth module launched by Quectel. It boasts a high-performance processor (ARM968) with a frequency of up to 160 MHz and supports IEEE 802.11b/g/n protocol and BLE 5.2. The module features built-in 288 KB RAM and 2 MB flash, ensuring efficient performance.

The module is in a LGA form factor with an ultra-compact package size, which optimizes the size and cost for end-products and is compatible with diverse designs.

The module complies with WPA-PSK, WPA2-PSK and WPA3-SAE security standards, supports TRNG (True Random Number Generator) and AES-128 encryption algorithm, and supports secure firmware and flash encryption.

The module supports UART and GPIO interfaces by default and supports SPI, I2C, ADC and PWM functions in QuecOpen® solution and many low power consumption modes and keep-alive mechanism, which provide flexibility and versatility for a range of applications, especially in smart homes and industrial IoT scenarios.

The module supports QuecOpen® solution and standard AT commands, with a compact protocol, and can realize efficient product development for customers.



Key Features

- ✓ Wi-Fi 4 module, single band (2.4 GHz) Wi-Fi, 1 × 1 antenna
- ✓ Bluetooth Low Energy (BLE 5.2)
- ✓ Built-in 288 KB RAM and 2 MB flash
- ✓ Supports up to 19 GPIOs for SPI, I2C, ADC and PWM interfaces in QuecOpen® solution
- ✓ RF coaxial connector, pin antenna interface, PCB antenna (optional)
- ✓ Wide operating temperature range: -40 to + 105 °C



IEEE 802.11b/g/n



BLE 5.2



Operating Temperature
Range: -40 to + 105 °C



Compact Size



LGA Form Factor



Multiple
Interfaces

Version: 1.1 | Status: Released

Quectel FGM842D Series

Wi-Fi 4 & BLE 5.2		FGM842D	FGM842D-P		
WLAN Protocol		IEEE 802.11b/g/n	IEEE 802.11b/g/n		
Wi-Fi Frequency Band		2.4 GHz	2.4 GHz		
Wi-Fi Modulation Mode		DSSS/ CCK/ BPSK/ QPSK/ 16QAM/ 64QAM	DSSS/ CCK/ BPSK/ QPSK/ 16QAM/ 64QAM		
Wi-Fi Operating Mode		AP/ STA	AP/ STA		
Bluetooth Protocol		BLE 5.2	BLE 5.2		
Encryption Mode		WPA-PSK/ WPA2-PSK/ WPA3-SAE/ AES-128/ TRNG	WPA-PSK/ WPA2-PSK/ WPA3-SAE/ AES-128/ TRNG		
Internet Protocol		IPv4, IPv6	IPv4, IPv6		
Kernel		ARM968 (up to 160 MHz)	ARM968 (up to 160 MHz)		
RAM		288 KB	288 KB		
Flash		2 MB ^①	2 MB ^①		
Dimensions		12.5 mm × 13.2 mm × 1.8 mm	16.6 mm × 13.2 mm × 1.8 mm		
Weight		Approx. 1.05 g	Approx. 1.14 g		
Temperature Range					
Operating Temperature		-40 °C to +105 °C	-40 °C to +105 °C		
Storage Temperature		-45 °C to +115 °C	-45 °C to +115 °C		
Certification					
Regulatory		Europe: CE America: FCC Canada: IC China: SRRC Australia/New Zealand: RCM	Europe: CE America: FCC Canada: IC China: SRRC Australia/New Zealand: RCM		
Interfaces					
Other Interfaces ^②		UART/ GPIO/ SPI/ I2C/ ADC/ PWM	UART/ GPIO/ SPI/ I2C/ ADC/ PWM		
Antenna Interface		× 1 (RF coaxial connector or pin antenna interface) (optional)	× 1 (PCB antenna)		
Electrical Features					
Power Supply Voltage		3.0 V–3.6 V, Typ.3.3 V	3.0 V–3.6 V, Typ.3.3 V		
Wi-Fi Performance					
		Receiver Sensitivity (Typ.)	Transmit Power (Typ.)	Receiver Sensitivity (Typ.)	Transmit Power (Typ.)
2.4 GHz	802.11b/1 Mbps	-98 dBm	18 dBm	-98 dBm	18 dBm
	802.11b/11 Mbps	-90 dBm	18 dBm	-90 dBm	18 dBm
	802.11g/6 Mbps	-90 dBm	16 dBm	-90 dBm	16 dBm
	802.11g/54 Mbps	-76 dBm	15 dBm	-76 dBm	15 dBm
	802.11n/HT20 MCS 0	-90 dBm	15 dBm	-90 dBm	15 dBm
	802.11n/HT20 MCS 7	-72 dBm	14 dBm	-72 dBm	14 dBm
Bluetooth Performance					
		Receiver Sensitivity (Typ.)	Transmit Power (Typ.)	Receiver Sensitivity (Typ.)	Transmit Power (Typ.)
	BLE (1 Mbps)	-96 dBm	6 dBm	-96 dBm	6 dBm
	BLE (2 Mbps)	-94 dBm	6 dBm	-94 dBm	6 dBm
	BLE (S = 2)	-96 dBm	6 dBm	-96 dBm	6 dBm
	BLE (S = 8)	-101 dBm	6 dBm	-101 dBm	6 dBm
Model					
Model	Ordering Code	Dimensions	Antenna	Development Board (Only for Debugging)	
FGM842D	FGM842DAAMD-3X-02	12.5 mm × 13.2 mm × 1.8 mm	RF coaxial connector	FGM842DAATB-3X-02	
FGM842D	FGM842DAAMD-0L-02	12.5 mm × 13.2 mm × 1.8 mm	Pin antenna interface	FGM842DAATB-0L-02	
FGM842D-P	FGM842DPAAMD-0P-02	16.6 mm × 13.2 mm × 1.8 mm	PCB antenna	FGM842DPAATB-0P-02	

NOTE:

- ①: Contact Quectel sales if you need a flash of other specifications.
- ②: See hardware design manual for details of the module interfaces.